

FIXED Stainless Steel or White Powder Coated Galvalume™

Available in brushed Stainless Steel or Bright White polyester finished Galvalume™ these ladders will make a durable and attractive addition to your dock, seawall or any marine application. Heavy 1½" (3,8cm) tubing ensures a positive grip and Stainless Steel hardware is included. 400lb (180kg). Capacity.

Rail Height: 18½" (47cm)
Tread Depth: 3¾" (9,5cm)
Tread Width: 14" (35,6cm)
Distance to first step: 12" (30,5cm)
Distance between treads: 11" (27,9cm)

WHITE GALVALUME #	BRUSHED STAINLESS STEEL #	DESCRIPTION
2103-F	2203-F	3-Step, Complete
2104-F	2204-F	4-Step, Complete
2105-F	2205-F	5-Step, Complete



FIXED, Welded Marine Grade Aluminum

These durable ladders are ideal for sure-footed access to and from the water or boat and with a load capacity of 665lb (300kg) these rugged ladders will stand the test of time. Perfect for seawalls or dock applications with varying water levels.

Rail Height: 19½" (49,5cm)
Tread Depth: 2" (5,1cm)
Tread Width: 16¼" (41,3cm)
Distance to first step: 8" (20,3cm)
Distance between treads: 12" (30,5cm)

PART #	DESCRIPTION
2013-F	3-Step, Complete
2014-F	4-Step, Complete
2015-F	5-Step, Complete
2019-F	Optional Kwik Release System




FIXED - WIDE STEP, Welded Marine Grade Aluminum

These durable ladders are ideal for sure-footed access to and from the water or boat and with a load capacity of 665lb (300kg) these rugged ladders will stand the test of time. Perfect for seawalls or dock applications with varying water levels.

Rail Height: 19½" (49,5cm)
Tread Depth: 4" (10,2cm)
Tread Width: 16¾" (42,5cm)
Distance to first step: 7¾" (20cm)
Distance between treads: 12" (30,5cm)

PART #	DESCRIPTION
2043-F	3-Step, Complete
2044-F	4-Step, Complete
2045-F	5-Step, Complete




FIXED - ECO², Weld-free Marine Grade Aluminum

These durable ladders have been designed to make a minimum carbon footprint. It is manufactured with no welding processes involved. Easily assembles in a few minutes with Stainless Steel fasteners. Wider steps make it better for a sure grip and safe climb. Easily accommodate weights up to 500lb (227kg).

Rail Height: 18" (45,7cm)
Tread Depth: 2½" (6,4cm)
Tread Width: 14" (35,6cm)
Distance to first step: 10" (25,4cm)
Distance between treads: 11" (27,9cm)

PART #	DESCRIPTION
2073-F	3-Step, Weld Free, Fixed, Complete
2074-F	4-Step, Weld Free, Fixed, Complete
2075-F	5-Step, Weld Free, Fixed, Complete

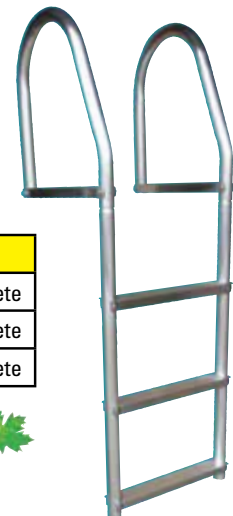

DOCK EDGE
GREEN PRODUCTS

QT: Quick Release systems are ideal for easy off-season or not-in-use storage. There are several DockEdge ladders with available quick release.