

Inflatable Mooring Buoys

- Heavy Duty seamless construction
- Extra tough rope eye
- Superior valve design conveniently located in the rope eye
- Great for boats of all sizes
- High Gloss finish
- Available in Bright Orange or White for high visibility
- Lifetime Warranty

| WHITE | ORANGE | DESCRIPTION |
|----------|----------|--------------------|
| 95-710-F | 95-610-F | 9½" (24,1cm) Dia. |
| 95-712-F | 95-612-F | 11¾" (29,9cm) Dia. |
| 95-715-F | 95-615-F | 14½" (36,8cm) Dia. |
| 95-718-F | 95-618-F | 17½" (44,5cm) Dia. |
| 95-720-F | 95-620-F | 19¾" (50,2cm) Dia. |



Hard Shell, Foamed Mooring Buoys

Bright orange polyethylene and filled with closed cellular foam for long life under the most extreme marine conditions. Resistant to fire, oil and gas. Molded in **UV Inhibitors and Fungicides**.

Use with Chain Collar 99-030-F and/or 90-032-F

WARNING: Never tie mooring lines to the top eyelet of the buoy or swivel eyelet. Always attach mooring lines to the anchor chain swivel beneath the buoy.

| WHITE | ORANGE | DESCRIPTION | BUOYANCY |
|----------|----------|----------------------------|-------------|
| 90-025-F | 90-027-F | 24" (61cm) Mooring Buoy, | 80lb (36kg) |
| | 90-023-F | 18" (45,7cm) Mooring Buoy, | 36lb (16kg) |



Mooring Buoys Chain Collar


Flared Galvalume™ collar prevents chain wear or chaffing. One piece, weld-free and corrosion resistant. Rely on it to last and last. Fits 1½" (4,8cm) dia. (2" (5,1cm) nominal) collar/ spindle openings. Galvalume™ has 10X the corrosion resistance of hot-dipped galvanized steel.

| PART # | DESCRIPTION |
|----------|---------------------------------|
| 90-030-F | Mooring Buoy Collar, Galvalume™ |



Mooring Buoys Center Rod & Swivel

| PART # | DESCRIPTION |
|----------|---|
| 90-032-F | Mooring Buoy Swivel, Hot Dip Galvanized |

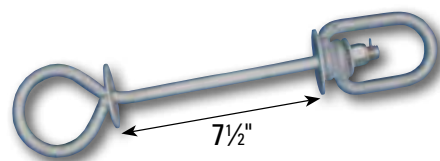

QT: For threaded clasps or eyes, use a thread adhesive or damage any protruding threads slightly to prevent loosening over time and use.